

THE PERFECT PARTNER

A reliable and protective system for applications with high impact loads and abrasive soil.

The tooth system has been developed to effectively address the forces to which it is subjected during operation. To achieve the best possible penetration, the system has been designed with a very low profile.

ProClaws teeth can easily be exchanged without having to remove the shrouds first. The mechanical lock is mounted and dismantled from the upper side,

which is a major advantage in the case of a lip assembly with shrouds. To maintain optimal productivity on the job, the ProClaws system has wear indicators on both teeth and adapters.

Once the tooth has been used for an optimum period, the wear indicator shows when it's time to replace it. The adapters also have wear indicators to prevent breakage.

USER FRIENDLY


Reusable and user friendly mechanical lock. Easy to mount, dismount and well protected while in use.

STRONG AND RELIABLE ADAPTER

Extended operation time, which leads to lower maintenance costs.

FUNCTIONAL DESIGN

Streamlined tooth and self sharpening – better penetration, less stress on the machine and lower fuel consumption.

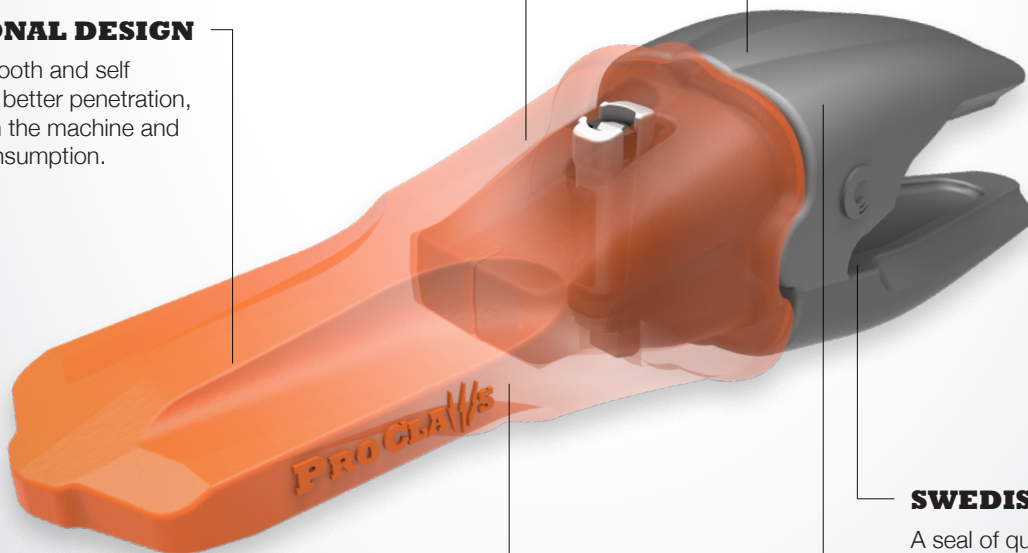

SWEDISH STEEL

A seal of quality and guarantees a responsible total solution with minimal environmental impact.

EARLY WARNING

Wear indicators on tooth and adapter signals when the part no longer performs at optimal level.

Features for high performance penetration.

EXCAVATORS

Available for machines 25-250 tons.



ADAPTERS

BE BME Wear cap CCE Wear cap

TEETH

GPE PE AE WE

WHEEL LOADERS

Available for machines 50-250 tons.

ADAPTERS

TL TML Wear cap

TEETH

AL XAL HAL

